



| 平衡重 | | 2600/1300kg | | |
|---------|---------|-------------|---------|---------|
| Diagram | Diagram | (kg) | PHZ2600 | PHZ1300 |
| | | 14300 | 5 | 1 |
| | | 13000 | 5 | 0 |
| | | 11700 | 4 | 1 |
| | | 10400 | 4 | 0 |
| | | 9100 | 3 | 1 |

附着Anchorage

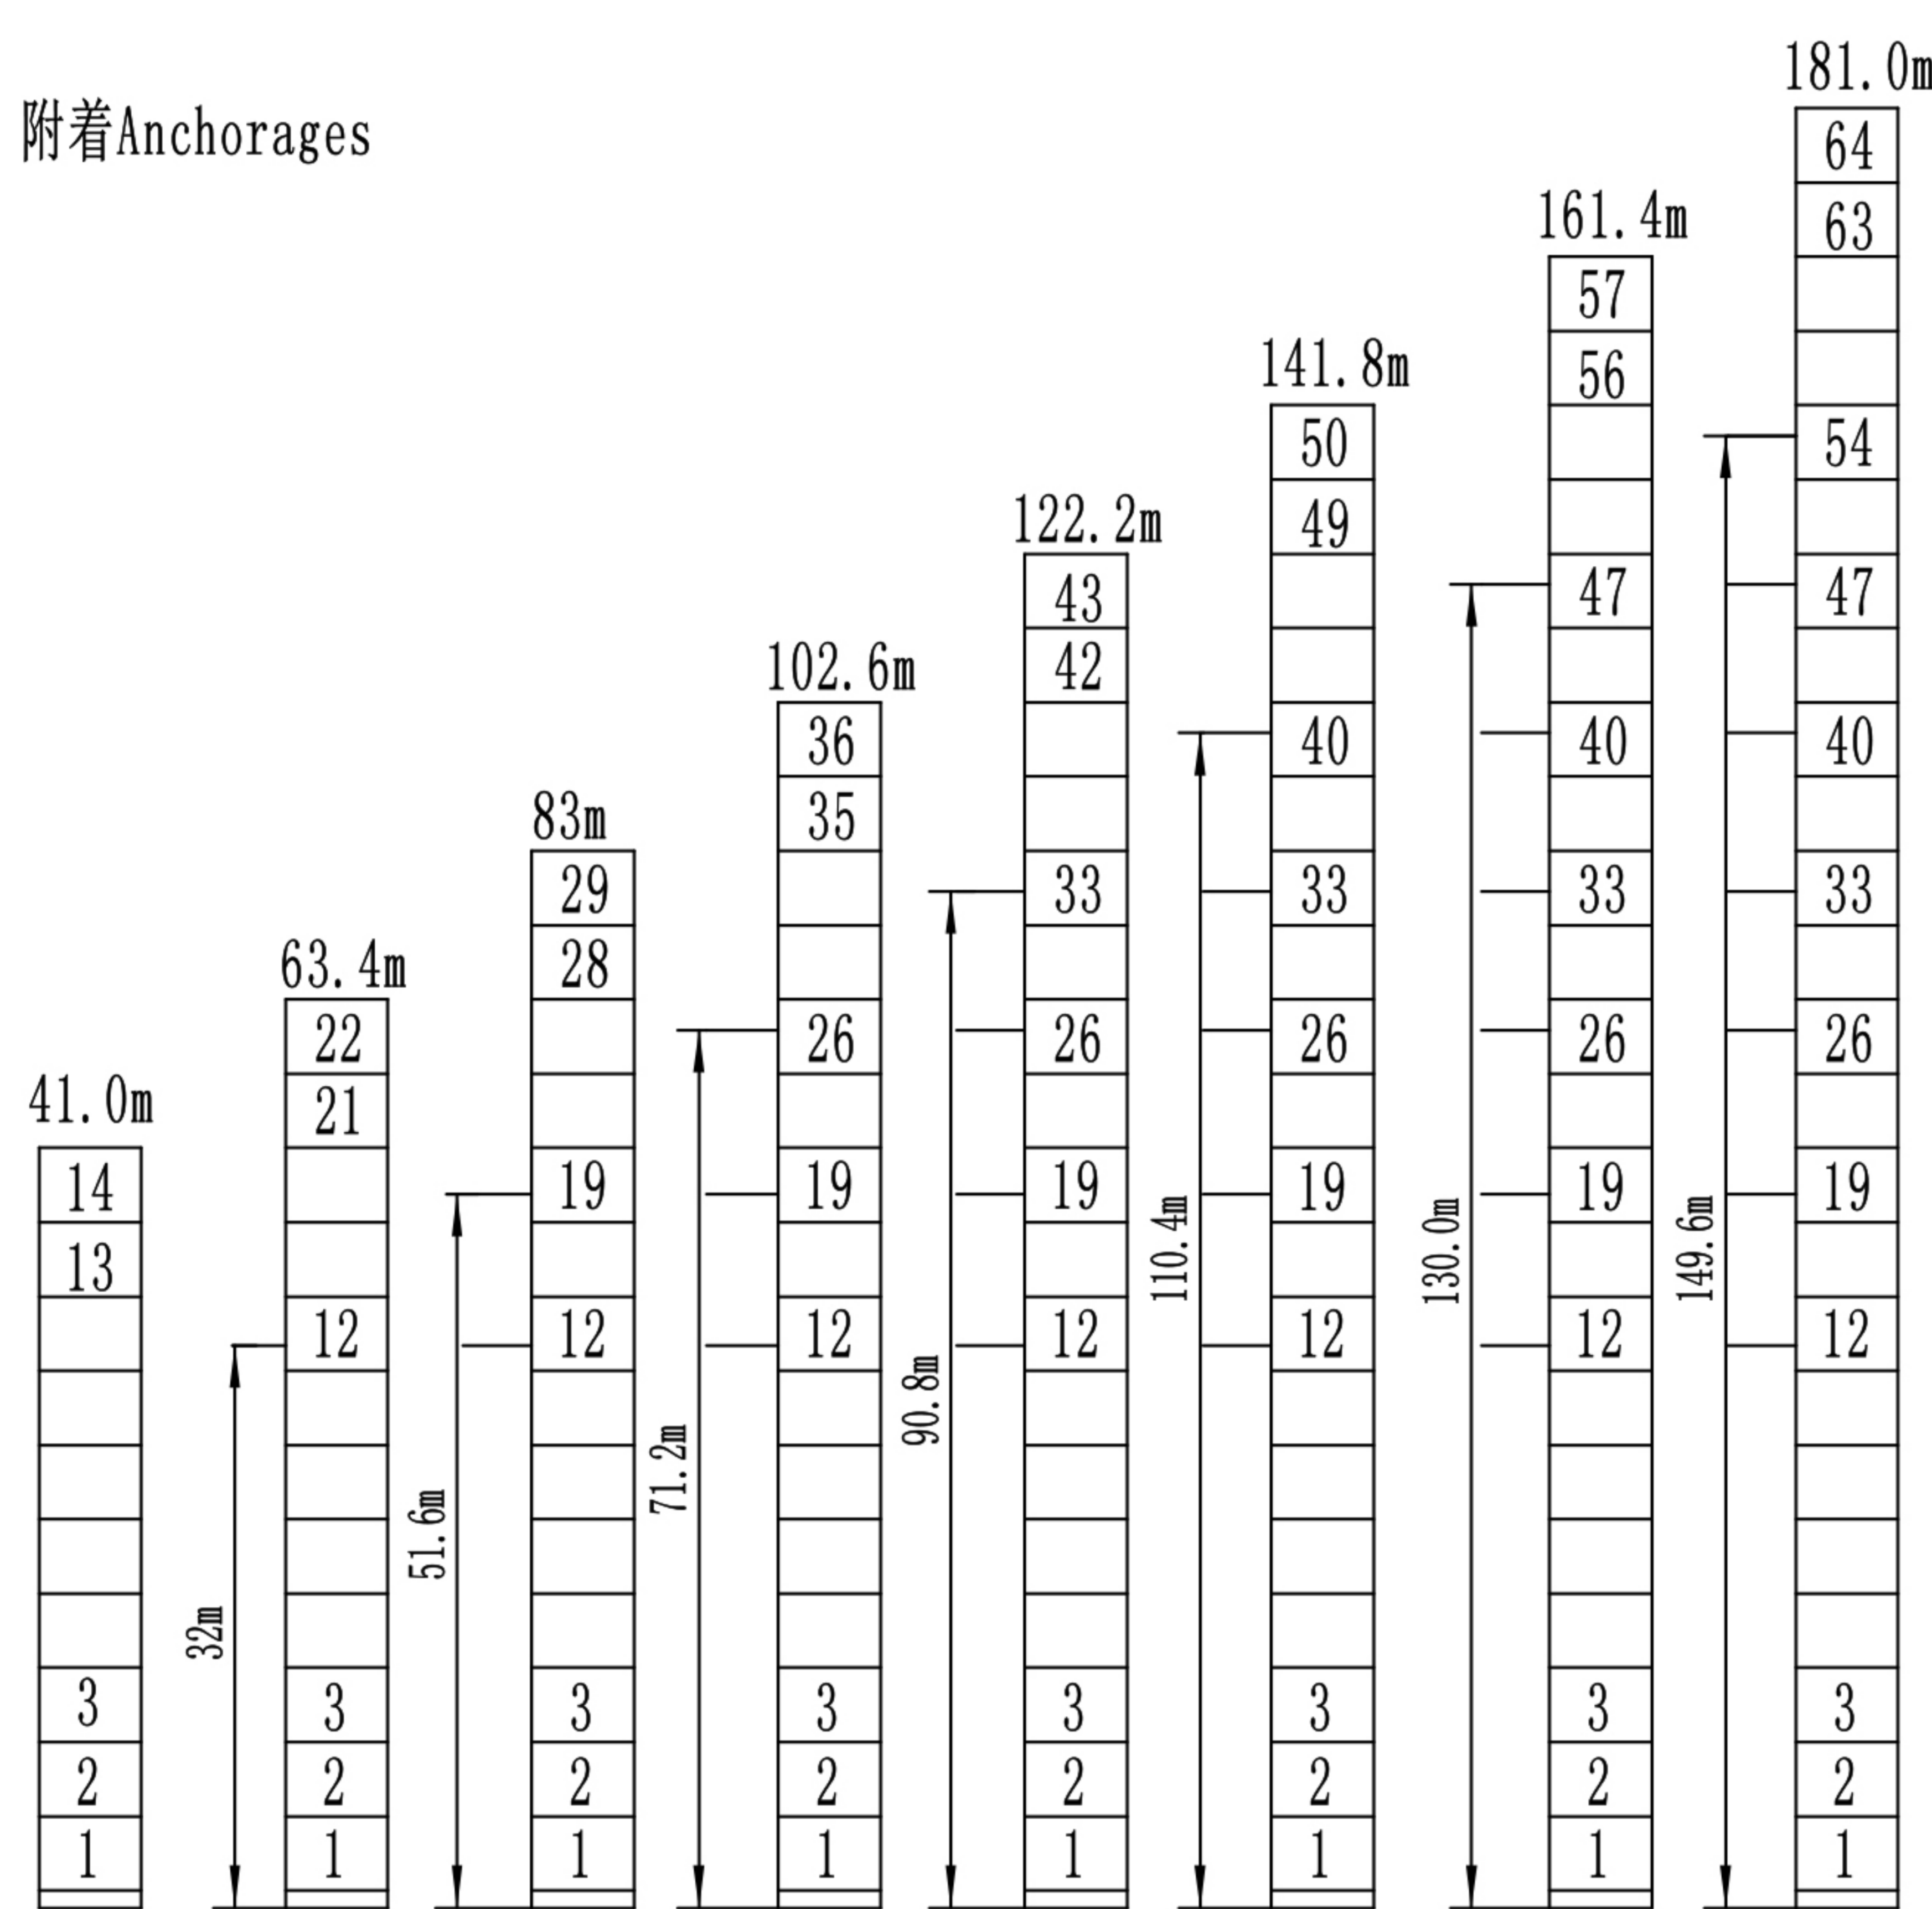

塔身Masts/反力Reaction

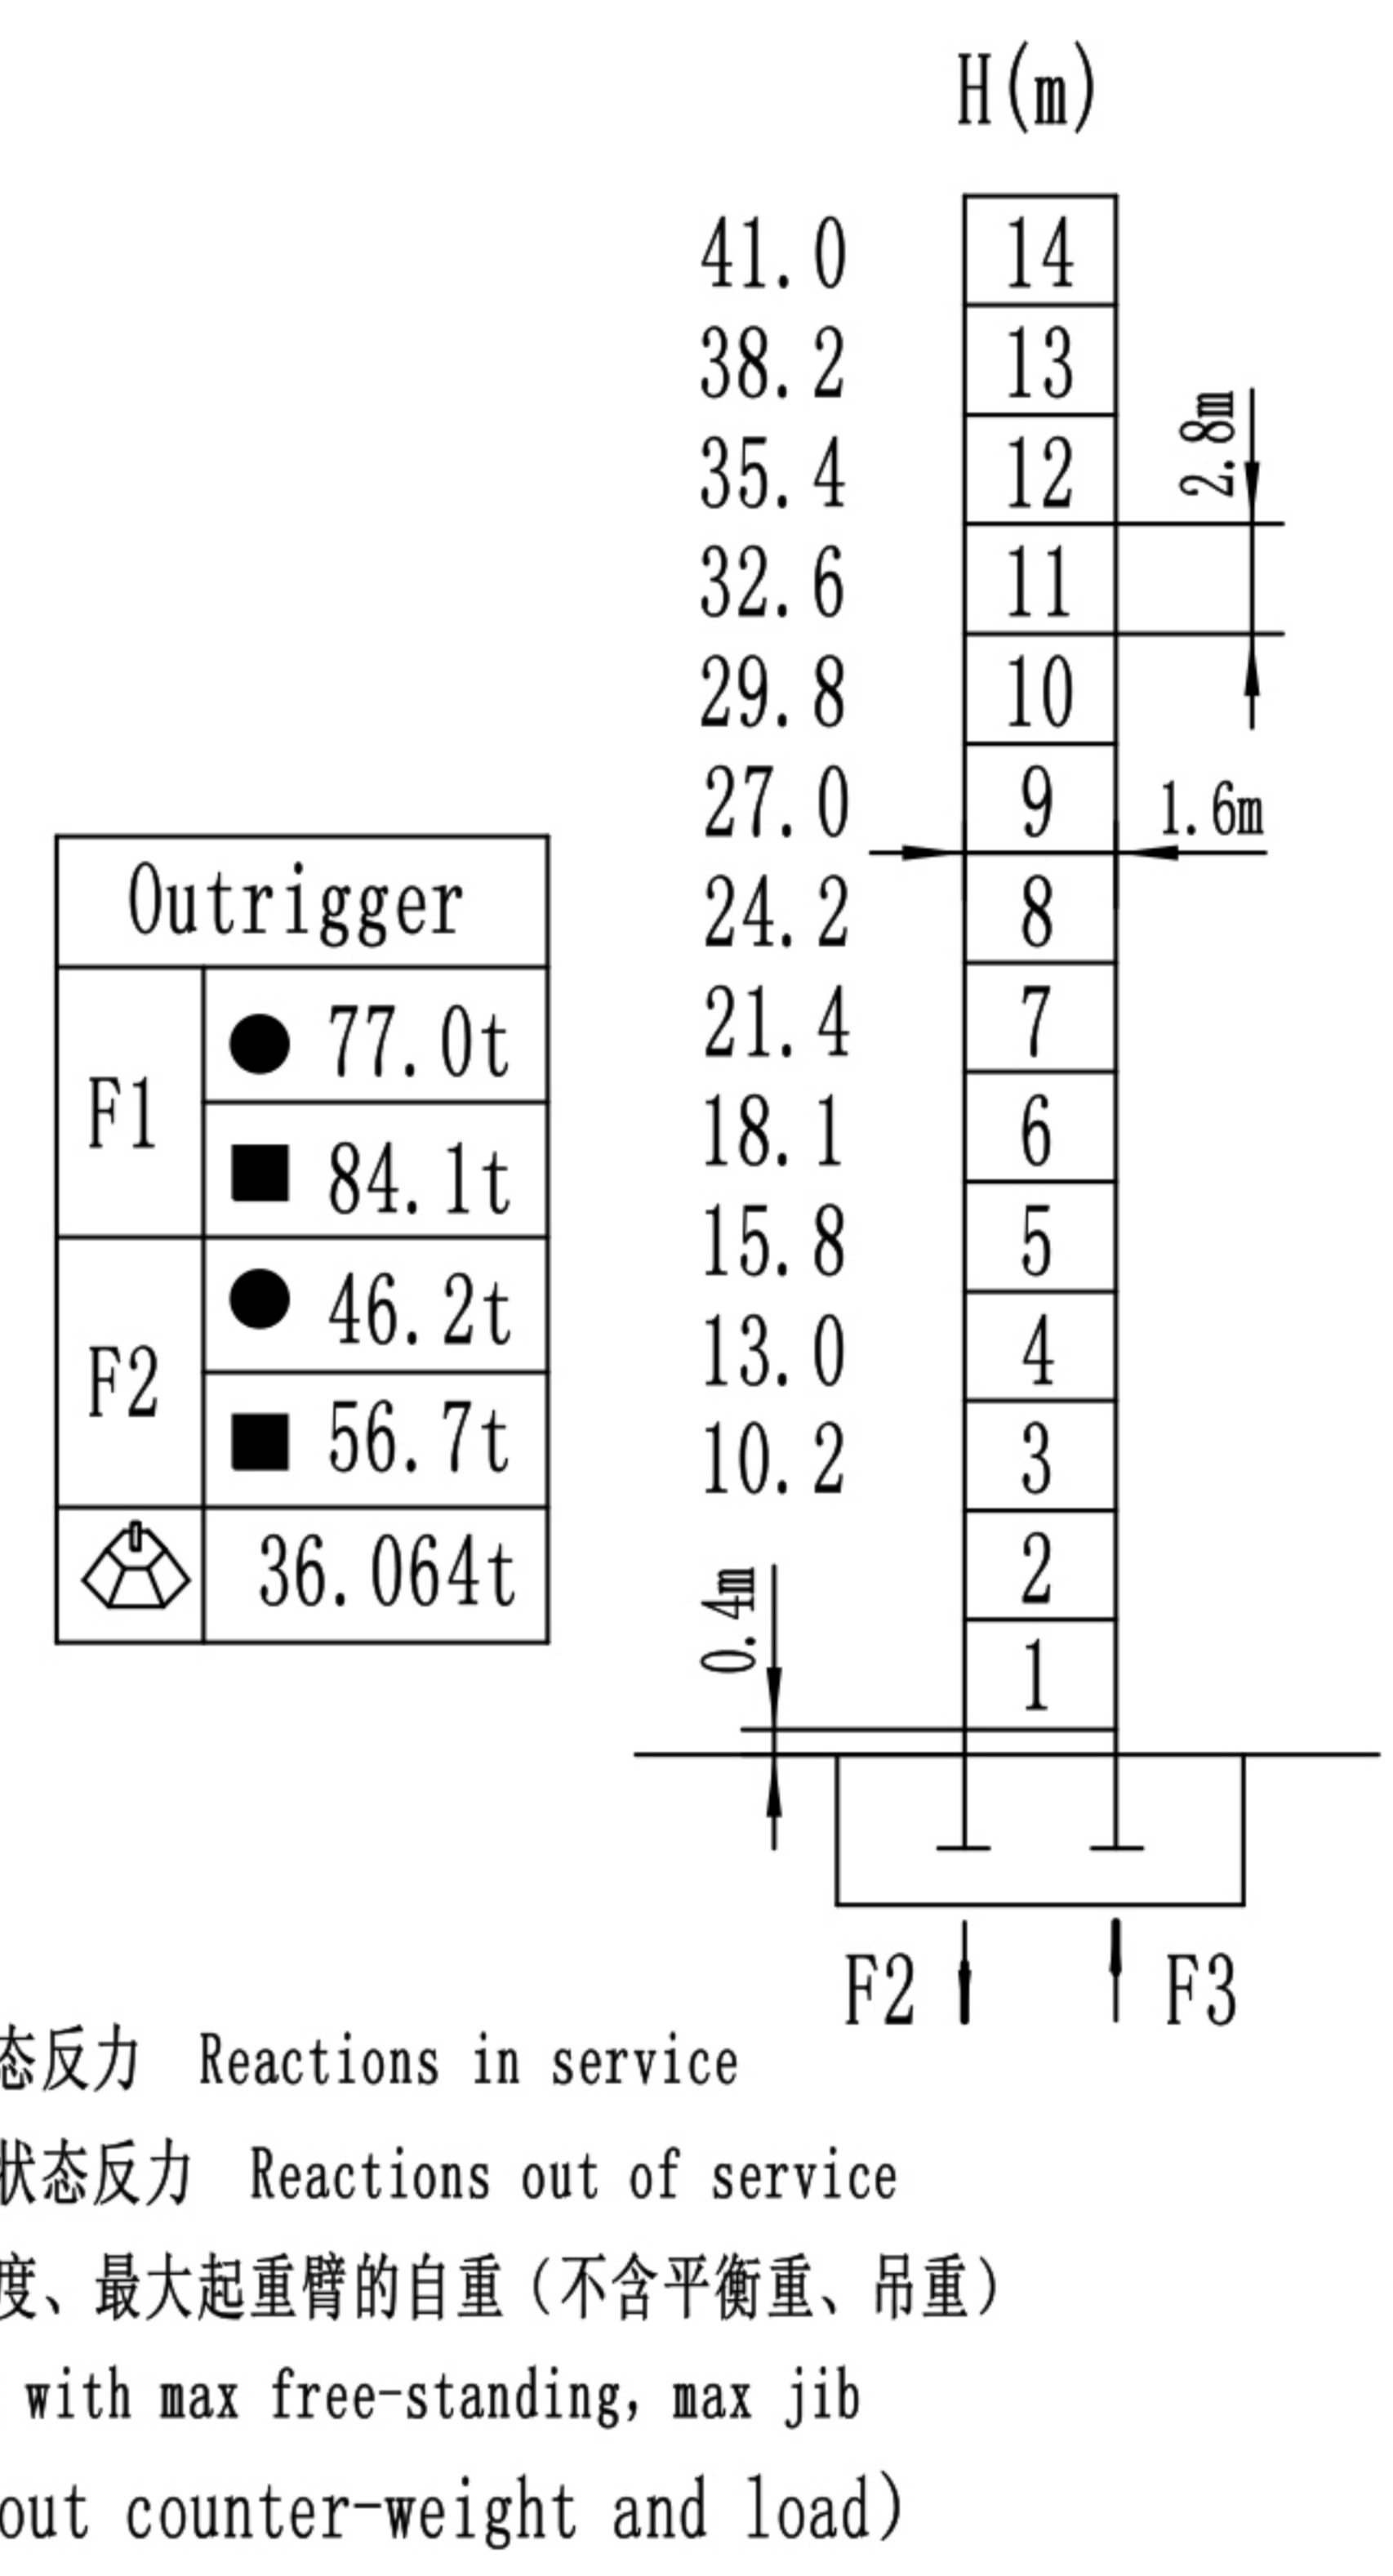

- 工作状态反力 Reactions in service
- 非工作状态反力 Reactions out of service
- ⊕ 独立高度、最大起重臂的自重 (不含平衡重、吊重)
Weight with max free-standing, max jib
(without counter-weight and load)

起重特性Load Diagrams

| R (m) | Max Capacity (m/t) | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 |
|-------------|--------------------|-------------|------|------|------|------|------|------|------|------|
| | | 3-16.76/6.0 | 4.92 | 3.80 | 3.06 | 2.52 | 2.13 | 1.82 | 1.57 | 1.36 |
| 3-31.35/3.0 | 3.00 | | | | 2.62 | 2.23 | 1.92 | 1.67 | 1.46 | 1.30 |
| 3-17.84/6.0 | 5.28 | 4.09 | 3.30 | 2.73 | 2.31 | 1.98 | 1.71 | 1.50 | | |
| 3-33.37/3.0 | 3.00 | | | | 2.83 | 2.41 | 2.08 | 1.81 | 1.60 | |
| 3-19.22/6.0 | 5.74 | 4.46 | 3.60 | 2.99 | 2.54 | 2.18 | 1.90 | | | |
| 3-35.96/3.0 | 3.00 | | | | 2.64 | 2.28 | 2.00 | | | |
| 3-20.00/6.0 | 6.00 | 4.66 | 3.78 | 3.14 | 2.67 | 2.30 | | | | |
| 3-37.42/3.0 | 3.00 | | | | 2.77 | 2.40 | | | | |
| 3-20.78/6.0 | 6.00 | 4.87 | 3.95 | 3.29 | 2.80 | | | | | |
| 3-38.88/3.0 | 3.00 | | | | 2.90 | | | | | |

传动机构Mechanisms

| 配置Configuration | | b | | bb | | kW | |
|-----------------|----------------|-------|-------|------|------|------|----------------------------------|
| | QTJ6.80PY | m/min | 0~80 | 0~40 | 0~40 | 0~20 | 420m(5 layers) |
| | | t | 1.5 | 3 | 3 | 6 | |
| | HP40.120.195A | r/min | 0~0.6 | | | 4×2 | ▲超出咨询我们 Consult us if overtop |
| | BP4060X | m/min | 0~40 | | | 4 | |
| | 380V(±10%)50Hz | | 37kW | | | | |